


GBP RIGID GRADING & DITCHING BUCKET

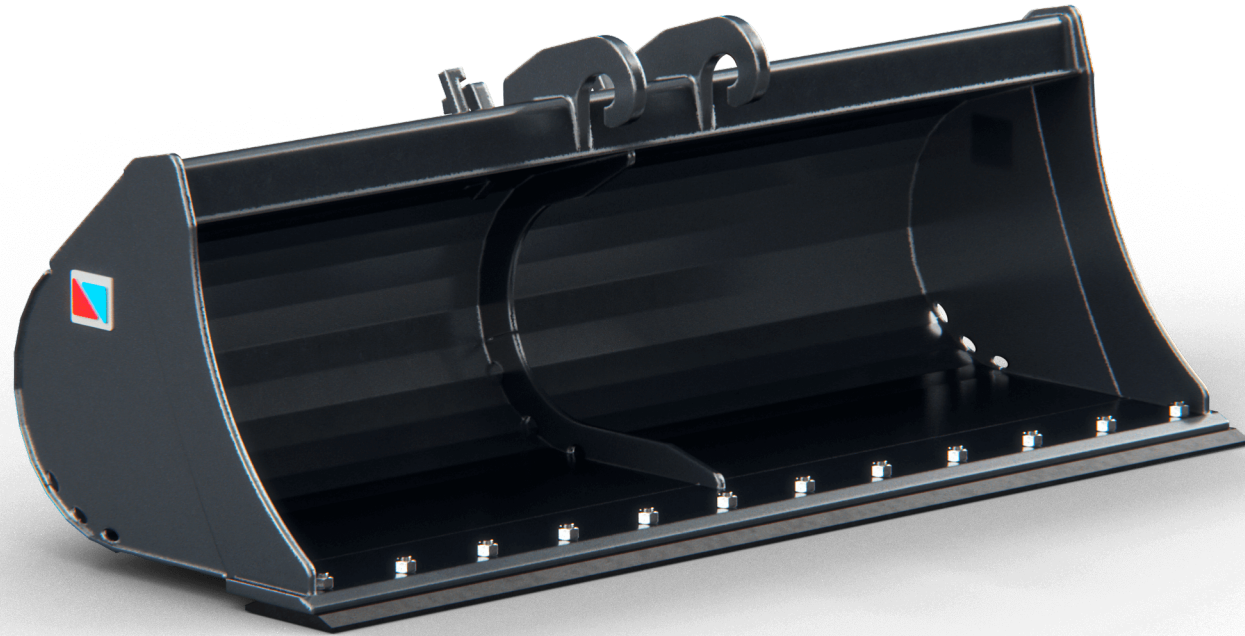


Base features:

- **HB500** cutting edge
- **Reinforcement bevel**
- **Round inner profile** for smooth material handling
- Top bent section
- Drainage holes
- Protected weld seams at bottom

Optional features:

- **Recessed adapter** bracket
- HB400 **reversible cutting edge** RCE
- HB500 **rear cutting edge**
- **Frontside** cutting edges HB500
- Wear bars

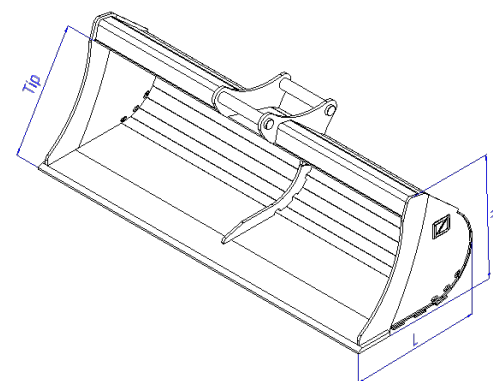

The Rigid Grading and Ditching Bucket is tailored for mini-excavators and is **optimal** for tasks like ditch maintenance, grading, and creating slopes. It's available in sizes from 600 mm to 1800 mm, with capacities from 42 dm³ to 504 dm³. Constructed from S355JR2 and Hardox steel and other high-quality materials, this bucket is built to last, featuring a **HB500 cutting edge** for extra durability. Its **rigid top section** ensures stability, while **wear bars** minimize wear on bucket's bottom. A **bolt-on cutting edge** is available for extended use, and other special features like suction **relief holes** for sticky soil or drainage holes.

	GBP-10	GBP-20	GBP-30	GBP-40	GBP-60	GBP-75	GBP-95
Machine class [t]	0.6 - 1.2	1.2 - 1.8	1.8 - 2.5	2.5 - 4.0	4.0 - 6.0	6.0 - 7.5	7.5 - 10
L / H / Tip	344/326/309	386/372/364	456/423/402	456/423/402	547/494/471	591/546/524	675/630/576
Width[mm]	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
600	42 / 28						
800	59 / 36	75 / 45					
1000	76 / 44	97 / 54	127 / 74	127 / 74			
1200		119 / 64	156 / 87	156 / 87	211 / 111		
1400				185 / 99	250 / 127	295 / 156	
1500					270 / 135	318 / 165	412 / 230
1600					290 / 143	342 / 175	442 / 243
1800						389 / 195	504 / 270