



2025



**HYDRO-INSTAL ATTACHMENTS
EXCAVATORS 10-50t**

sieruta.com

Located in Ostrołęka, the heart of the Kurpie region, **Hydro-Instal Attachments** stands as a testament to genuine craftsmanship. Our dedication to quality ensures you can **always rely on our products and services**.

Hydro-Instal Ostrołęka team

Hydro-Instal T.Sieruta B.Sieruta sp.j.
ul. Bohaterów Westerplatte 11
07-410 Ostrołęka
Poland
EU VAT ID: PL7581556948



sieruta.com

info@sieruta.com



Founded in 1996

Manufacturing attachments since 2008

More than 45000 attachments delivered

Localised in Ostrołęka, Poland, 120 km from Warsaw capital & airport



Focus on quality & customer service



Table of Contents

DIGGING & SORTING BUCKETS - p. 4

Maximize Digging & Sorting Efficiency: Equip your excavators with the perfect digging buckets for any soil condition and capacity. Explore our selection designed to optimize production and material handling on your next project.




DITCHING, GRADING, SLOPING BUCKETS - p. 14

Ditch clean, grade perfect, slope with ease: Uncover task-specific buckets for flawless trenches, level surfaces, and precise inclines.




SPECIAL USE BUCKETS - p. 26

Dive into Special use Buckets – hydraulic clamps for ultimate grabbing power, profile buckets for tailored trenching, and custom angles for unique applications.



NON-BUCKET ATTACHMENTS - p. 30

Attachments Beyond the Bucket: Expand your capabilities with grading beams for superior finishing, rippers (single & multi) for conquering tough terrain, and asphalt cutters for efficient pavement removal.

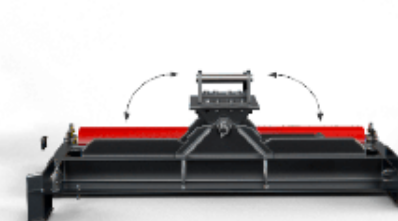



DB DIGGING BUCKET FOR FULL-SIZE EXCAVATOR




Maximize Excavator Efficiency: The DB Excavator Digging Bucket. Tackle demanding digging projects with superior capacity and durability.

Key Features:

- **Large Capacity** for Efficient Material Handling
- **Durable Construction** for Long Service Life
- Optimized Design for Hydraulic Power Efficiency - **Double Radius & Double Conical design**
- Available in **Economy** (up to 24 t), **Standard**, **Heavy Duty** (24 t +) versions
- **Rock version** available
- Available teeth systems: **CAT J series**, **BYG Futura**, **ESCO UltraLok**

Equip your excavator for peak performance on any excavation project with the DB Excavator Digging Bucket. This robust attachment delivers exceptional capacity and durability, conquering challenging digging tasks with ease. Engineered for optimal performance with your excavator's hydraulic system, it maximizes productivity and minimizes downtime.

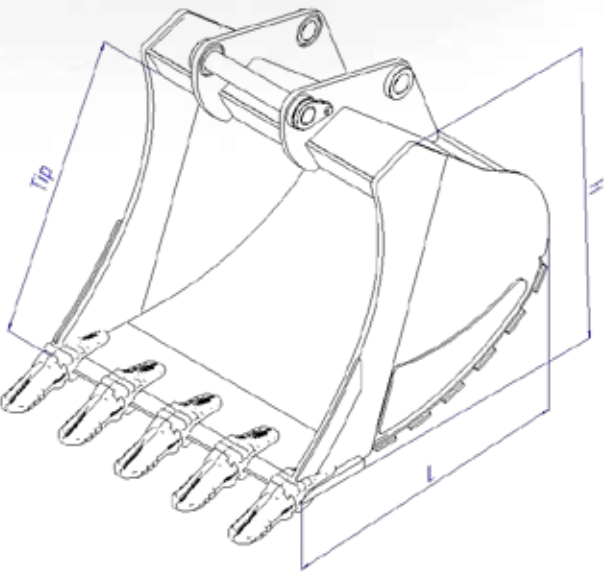

The DB Excavator Digging Bucket is ideal for:

- Large-scale excavation projects (foundations, basements, trenches)
- Efficient loading and transporting of bulk materials (dirt, rock, debris)
- Construction and demolition applications requiring heavy-duty digging
- Mining and quarrying operations
- Any task demanding exceptional digging power and capacity
- Direct fit, SW and CW brackets

Upgrade your full-size excavator's capabilities and conquer demanding excavation challenges with the DB Excavator Digging Bucket. Contact us today to discuss your project needs and choose the perfect bucket size for your machine!

	DB-120	DB-160	DB-190	DB-230	DB-300	DB-400	DB-500
Machine class [t]	10 - 12	12 - 16	16 - 19	19 - 23	23 - 30	30 - 40	40 - 50
L / H / Tip	916/866/780	1046/989/892	1203/1138/1028	1249/1177/1069	1308/1235/1119	1547/1391/1278	1665/1565/1420
Width[mm] / Teeth	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
400 / 3	139 / 156						
500 / 3	190 / 178	225 / 248					
600 / 3	244 / 200	292 / 276	374 / 350	391 / 420			
800 / 4	356 / 244	434 / 337	557 / 424	582 / 502	628 / 655		
1000 / 5	475 / 288	584 / 396	751 / 497	786 / 583	848 / 766	1082 / 957	
1200 / 5	597 / 332	740 / 455	955 / 570	1001 / 664	1079 / 878	1376 / 1088	
1400 / 6			1164 / 643	1222 / 746	1325 / 989	1682 / 1219	1988 / 1515
1500 / 6				1335 / 787	1447 / 1044	1839 / 1285	2176 / 1593
1600 / 6					1569 / 1100	1967 / 1348	2367 / 1672
1800 / 6						2288 / 1480	2755 / 1829
Teeth	J250, V19, U20	J300, V23, U30	J300, V23, U30	J300, V29, U30	J350, V33, U35	J350, V33, U35	J400, V39, U40
Quick coupler brackets	CW20 SW33	CW20 SW33	CW20 SW33, SW48	CW30 SW33, SW48	CW30, CW40 SW48	CW45 SW48, SW66	CW55 SW66



SDB SKELETON DB BUCKET




Maximize Sifting & Digging Efficiency: The SDB Skeleton Bucket. Separate & sort materials while digging with its interlocking ribs, ideal for trenching, drainage, and pipe bedding.

Key Features:

- **Interlocking Ribs** for Efficient Sifting & Separation
- Optimizes Material Handling & **Reduces Sorting Time**
- **Durable Construction** for Demanding Applications
- Available in **Various Rib Spacings** for Diverse Materials
- Hardox rods option; C45 rods standard
- Available teeth systems: **CAT J series, BYG Futura, ESCO UltraLok**

Equip your excavator for superior digging and material handling with the SDB Skeleton Bucket. This attachment features interlocking steel ribs that efficiently sift and separate materials during excavation. Ideal for trenching, drainage projects, and pipe bedding, the Skeleton Bucket maximizes productivity and streamlines workflows.

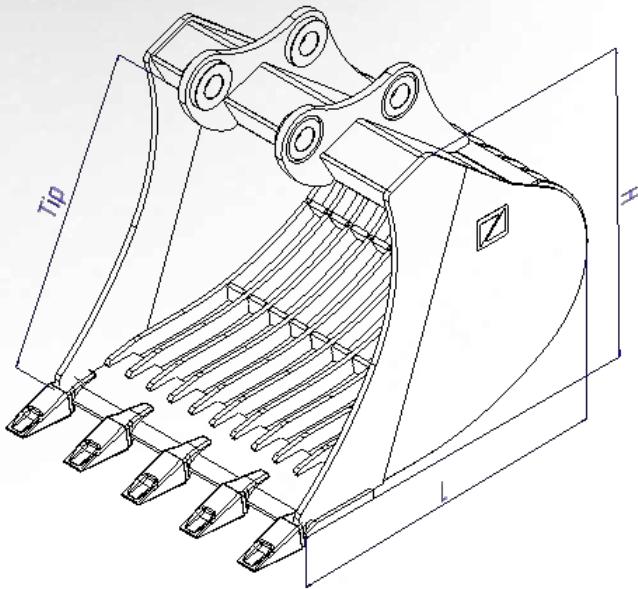

The Full-Size Skeleton Bucket for Excavators is ideal for:

- Trenching projects (utilities, drainage, foundations)
- Streamlining pipe bedding and backfilling operations
- Efficient sorting and removal of debris during excavation
- Landscaping projects requiring precise material separation
- Any application demanding efficient digging, sifting, and material handling

Upgrade your excavator's capabilities and conquer demanding projects with the SDB Skeleton Bucket. Contact us today to explore the possibilities and choose the optimal rib spacing for your specific needs!

	SDB-120	SDB-160	SDB-230	SDB-300	SDB-400	SDB-500
Machine class [t]	10 - 12	12 - 16	16 - 24	24 - 30	30 - 40	40 - 50
L / H / Tip	925/866/785	1046/978/886	1296/1130/1071	1318/1234/1121	1511/1427/1283	1678/1578/1431
Width[mm] / Teeth	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
1000 / 5	435 / 286	543 / 392				
1200 / 5	548 / 333	687 / 448				
1400 / 6			1183 / 833			
1500 / 6			1290 / 880	1375 / 1051		
1600 / 6				1492 / 1106	1917 / 1411	
1800 / 6					2224 / 1550	2622 / 1995
2000 / 6						3000 / 2172
Teeth	J250, V19, U20	J300, V29, U30	J300, V29, U30	J350, V33, U35	J350, V33, U35	J400, V39, U40
Quick coupler brackets	CW20 SW33	CW20 SW33	CW30 SW33, SW48	CW30, CW40 SW48	CW45 SW48, SW66	CW55 SW66

DBF DIGGING BUCKET FLAT TOP




Maximize Excavator Digging Use: The DBF Flat Top Digging Bucket. Effortless attachment changes & superior performance for peak digging efficiency.

Key Features:

- **Optimized** for Quick Coupler Systems
- Superior Digging Performance - **Double Radius & Double Conical design**
- Durable Construction
- Available in **Economy** (up to 24 t), **Standard** (all sizes), **Heavy Duty** (24 t +) versions
- **Rock version** available
- Available teeth systems: **CAT J series, BYG Futura, ESCO UltraLok**

Equip your full-size excavator for maximized productivity with the DBF Excavator Quick Coupler Digging Bucket. This robust attachment offers exceptional digging performance and integrates seamlessly with your excavator's quick coupler system. Effortless attachment changes allow you to switch between digging tasks quickly, minimizing downtime and maximizing efficiency on any project.

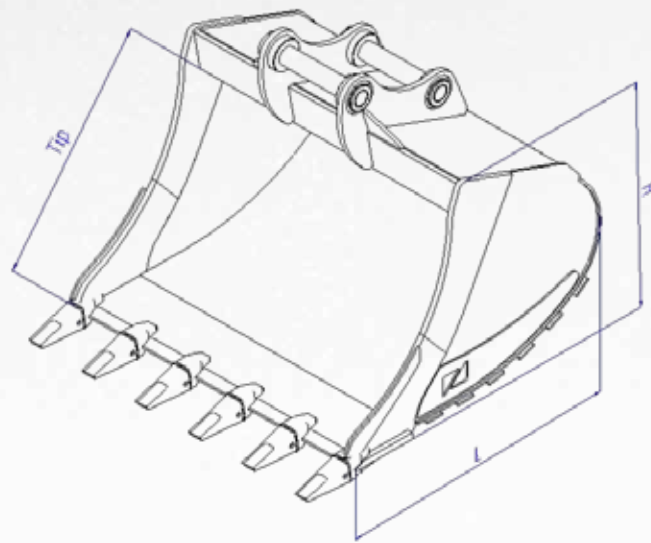

The DBF Excavator Quick Coupler Digging Bucket is ideal for:

- Large-scale excavation projects requiring frequent attachment changes (foundations, basements, trenches)
- Construction and demolition applications demanding flexibility and efficiency
- Streamlining workflows and optimizing excavator utilization on diverse jobsites
- Mining and quarrying operations with various digging requirements (Rock version)
- Any application where maximizing excavator uptime and versatility is crucial
- S-System, MS, SW, OQ, EasyLock, Martin, Volvo S etc. brackets

Upgrade your excavator's capabilities and conquer demanding projects with the DBF Quick Coupler Digging Bucket. Contact us today to discuss your project needs and choose the perfect bucket size for your machine!

	DBF-120	DBF-160	DBF-190	DBF-230	DBF-300	DBF-400	DBF-500
Machine class [t]	10 - 12	12 - 16	16 - 19	19 - 23	23 - 30	30 - 40	40 - 50
L / H / Tip	1077/816/818	1157/877/877	1257/962/960	1337/1022/1020	1418/1100/1099	1573/1220/1225	1737/1375/1377
Width[mm] / Teeth	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
400 / 3	160 / 155						
500 / 3	216 / 177	250 / 256					
600 / 3	275 / 198	317 / 286	376 / 346	398 / 411			
800 / 4	400 / 241	461 / 346	544 / 419	578 / 495	630 / 580		
1000 / 5	536 / 284	615 / 406	724 / 492	769 / 579	844 / 674	1024 / 854	
1200 / 5	673 / 326	773 / 466	911 / 565	981 / 663	1069 / 768	1296 / 968	
1400 / 6			1102 / 638	1199 / 747	1306 / 862	1580 / 1083	1897 / 1470
1500 / 6				1308 / 789	1427 / 909	1727 / 1140	2060 / 1543
1600 / 6					1550 / 957	1875 / 1198	2241 / 1617
1800 / 6						2179 / 1312	2611 / 1765
Teeth	J250, V19, U20	J300, V23, U30	J300, V23, U30	J300, V29, U30	J350, V33, U35	J350, V33, V39, U35	J460, V51, U55
Quick coupler brackets	S45, S50 MS10 OQ45, OQ60 M18	S60 MS10 OQ60, OQ65 M18 S1 SW33	S60 MS10 OQ65 M26 S1 SW33	S70 MS21 OQ65, OQ70 M26 S2 SW33	S70 MS21 OQ70, OQ70-55 S2 SW48	S80 MS25 OQ80 S3 SW48	S90 OQ90 SW66

RDBF SKELETON ROD DBF BUCKET




Boost Sorting Productivity: The RDBF Skeleton Bucket. Interlocking rods separate materials during excavation, ideal for efficient trenching, drainage, and pipe bedding.

Key Features:

- **Interlocking Rods** for Efficient Material Separation
- **Durable Construction** for Demanding Trenching Tasks
- Available in **Various Rod Spacings**
- Hardox rods option; C45 rods standard
- Available teeth systems: **CAT J series, BYG Futura, ESCO UltraLok**

Equip your large excavator for faster and more productive trenching projects with the innovative RDBF Skeleton Bucket. This attachment features interlocking steel rods that efficiently sift and separate materials like soil and rocks while you dig. Ideal for utility trenches, drainage systems, and pipe bedding applications, the Skeleton Bucket streamlines workflows and maximizes your output.

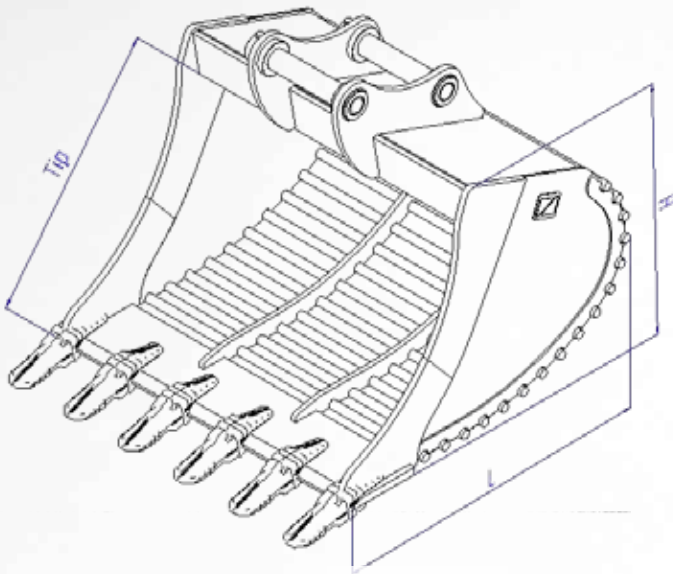

The RDBF Rod Skeleton Bucket for Excavators is ideal for:

- Trenching projects of all kinds (utilities, drainage, foundations)
- Streamlining pipe bedding and backfilling operations
- Efficient sorting and removal of debris during trenching
- Landscaping projects requiring precise material separation
- Any application demanding faster trenching with less sorting time
- S-System, MS, SW, OQ, EasyLock, Martin, Volvo S etc. brackets

Upgrade your excavator's capabilities and conquer trenching challenges with the RDBF Skeleton Bucket. Contact us today to explore the possibilities and choose the optimal rod spacing for your specific needs!

	RDBF-120	RDBF-160	RDBF-190	RDBF-230	RDBF-300	RDBF-400	RDBF-500
Machine class [t]	10 - 12	12 - 16	16 - 19	19 - 23	23 - 30	30 - 40	40 - 50
L / H / Tip	1078/816/818	1159/877/877	1274/962/960	1350/1022/1020	1447/1100/1099	1600/1220/1225	1803/1375/1377
Width [mm] / Teeth	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
1000 / 5	536 / 271	615 / 402					
1200 / 5	673 / 308	773 / 456	911 / 563				
1300 / 6			1003 / 597	1092 / 657			
1400 / 6			1100 / 630	1199 / 693	1306 / 837		
1500 / 6				1308 / 730	1427 / 880	1727 / 1067	
1600 / 6					1550 / 922	1875 / 1115	2241 / 1511
1800 / 6						2179 / 1213	2611 / 1633
2000 / 6							2999 / 1755
Teeth	J250, V19, U20	J300, V29, U30	J300, V29, U30	J300, V29, U30	J350, V33, U35	J350, V33, U35	J460, V51, U55
Quick coupler brackets	S45, S50 MS10 OQ45, OQ60 M18	S60 MS10 OQ60, OQ65 M18 S1 SW33	S60 MS10 OQ65 M26 S1 SW33	S70 MS21 OQ65, OQ70 M26 S2 SW33	S70 MS21 OQ70, OQ70-55 S2 SW48	S80 MS25 OQ80 S3 SW48	S90 OQ90 SW66

DSX NORDIC HEAVY DUTY DIGGING BUCKET



Power Through Demanding Conditions: The DSX Nordic Heavy Duty Digging Bucket. Hardox 450 construction tackles tough jobs, maximizing excavator performance in extreme applications.

Key Features:

- **Hardox 450** Steel for Unmatched Durability
- Optimized Design for **Extreme Applications**
- **Superior Digging Performance** in Demanding Conditions
- Fits Most Excavator Models
- Available teeth systems: **CAT J series, BYG Futura, ESCO UltraLok**

Equip your excavator for peak performance in the most challenging environments with the **Nordic Heavy Duty Digging Bucket**. Constructed from ultra-high-strength Hardox® 450 steel, this attachment delivers exceptional wear resistance and durability, making it the perfect choice for tackling tough digging projects.

Hardox in My Body Certification (option):


This bucket is designed and can be manufactured to meet the stringent requirements of the Hardox® In My Body certification program, guaranteeing the use of genuine Hardox® steel for maximum performance and extended service life.



The Nordic Heavy Duty Digging Bucket is ideal for:

- Extreme digging conditions (rocky terrain, abrasive materials)
- Demolition and heavy-duty excavation projects
- Applications requiring maximum uptime and minimal maintenance
- Quarries and mines where durability is paramount
- Any project demanding a bucket built to conquer the toughest challenges

Upgrade your excavator's capabilities and conquer extreme digging conditions with the Nordic Heavy Duty Digging Bucket. Contact us today to explore the Hardox® advantage!

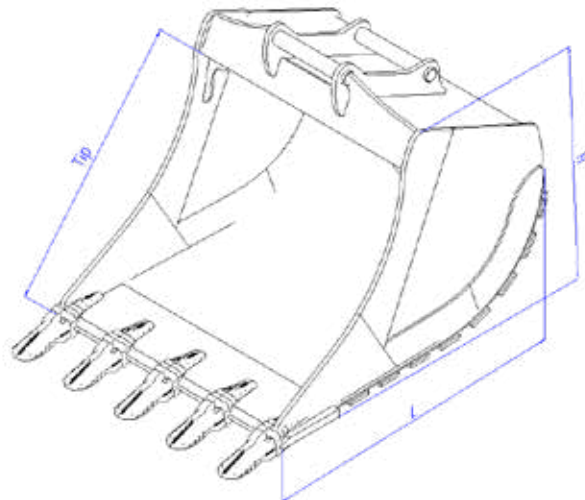

	DS-HD-190	DS-HD-250	DS-HD-300	DS-HD-400
Machine class [t]	14 - 19	19 - 25	25 - 30	30 - 40
L / H / Tip	1450/1040/1125	1537/1103/1194	1645/1177/1274	1688/1208/1306
Width[mm] / Teeth	SAE / KG	SAE / KG	SAE / KG	SAE / KG
800 / 4	570 / 505	615 / 642	678 / 755	
1000 / 5	771 / 592	837 / 745	922 / 879	921 / 952
1200 / 5	982 / 679	1070 / 847	1178 / 1002	1187 / 1083
1400 / 6				1462 / 1214
Teeth	J350, V29, U30	J350, V33, U35	J400, V39, U40	J400, V39, U40
Quick coupler brackets	S60 MS10 OQ65 S1	S70 MS21 OQ70 S2	S70 MS21 OQ70, OQ70-55 S2	S80 MS25 OQ80 S3



GD RIGID GRADING & DITCHING BUCKET



Precise Grading & Efficient Ditching: The GD Rigid Grading & Ditching Bucket. Tackle diverse projects with a robust design for superior control and clean results.

- Key Features:**
- **Rigid Design** for Exceptional Control
 - **Optimized Profile** for Efficient Grading & Ditching
 - **Durable Construction** for Long Service Life
 - **Back welded Cutting Edge** - optional
 - **Horizontal wear bars** - optional
 - **Reversible Bolt-on Cutting Edge** - optional

Equip your excavator for exceptional performance on any grading or ditching project with the GD Rigid Grading & Ditching Bucket. This versatile attachment delivers superior control and a rigid design, ensuring clean, precise results for various applications.

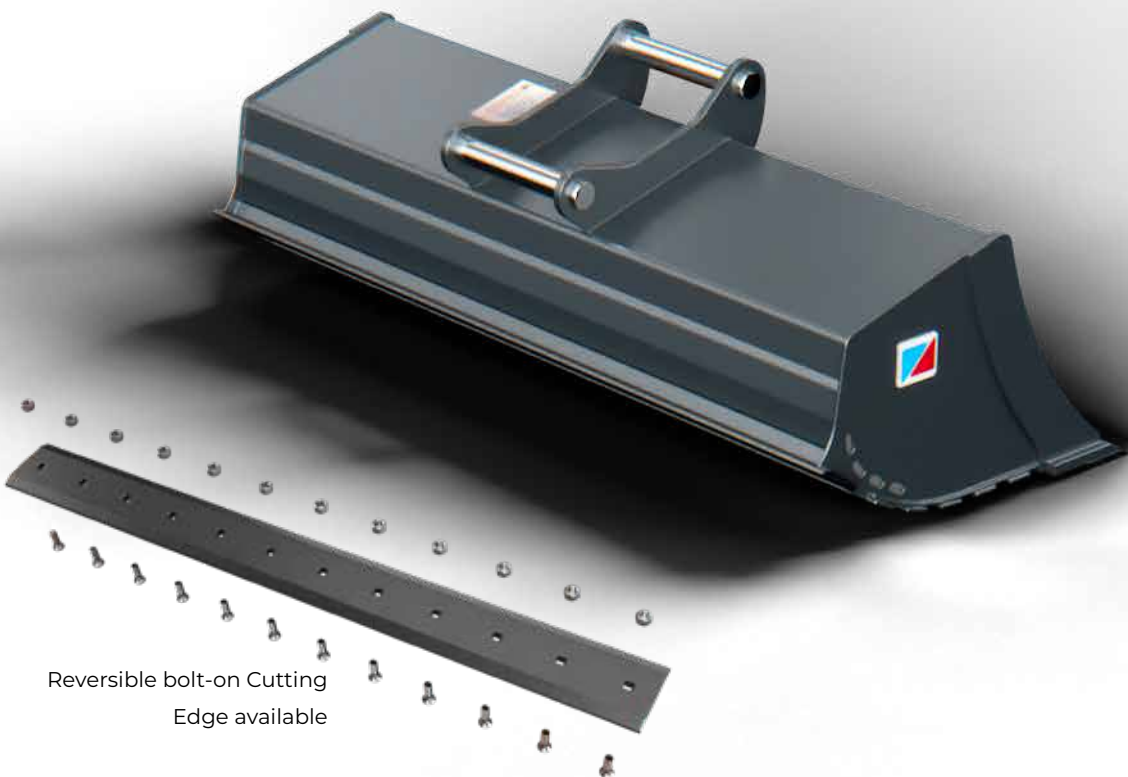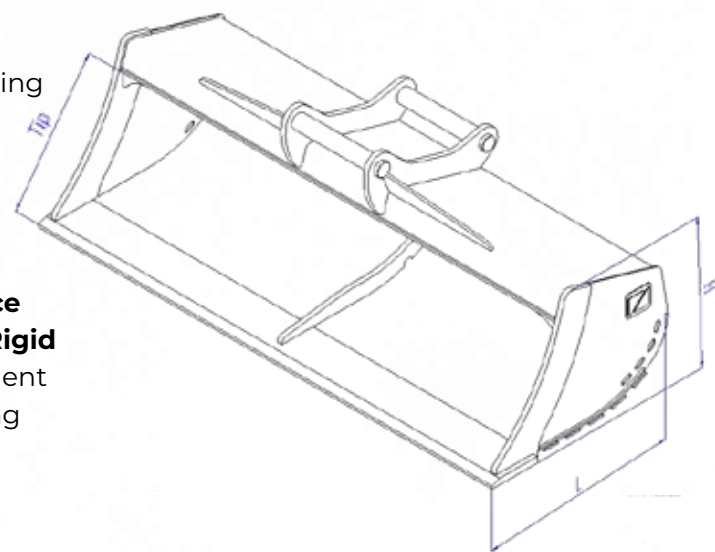

- The GD Rigid Grading & Ditching Bucket is ideal for:**
- Precise grading and leveling tasks
 - Efficient ditching for drainage, utility lines, and irrigation
 - Road construction and maintenance projects
 - Landscaping applications requiring clean lines and control
 - Any project demanding a versatile attachment for both grading and ditching

Upgrade your excavator's capabilities and conquer diverse grading and ditching challenges with the GD Rigid Grading & Ditching Bucket. Contact us today to explore the perfect fit for your machine!

	GD-160	GD-190	GD-230	GD-300	GD-400
Machine class [t]	12 - 16	16 - 19	19 - 23	23 - 30	30 - 40
L / H / Tip	807/563/547	865/603/585	937/661/643	1130/784/768	1231/848/827
Width[mm]	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
1600	484 / 305	544 / 325	644 / 365		
1800	550 / 338	618 / 358	731 / 403	1059 / 691	
2000	615 / 370	692 / 390	819 / 441	1188 / 752	1395 / 856
2400				1447 / 874	1700 / 988
2600					1851 / 1055
Quick coupler brackets	S60 MS10 OQ60, OQ65 M18 S1 SW33	S60 MS10 OQ65 M26 S1 SW33	S70 MS21 OQ65, OQ70 M26 S2 SW33	S70 MS21 OQ70, OQ70-S5 S2 SW48	S80 MS25 OQ80 S3 SW48

GDH HYDRAULIC GRADING & DITCHING BUCKET




Effortless Angle Control: GDH Tilt Grading Bucket. Achieve perfect slopes & conquer uneven terrain with 45° hydraulic tilt for efficient grading & ditching.

Key Features:

- **±45° Hydraulic Tilt:** Effortlessly achieve perfect slopes and conquer uneven terrain
- **Hydraulic Pilot Check Valve (Standard):** Ensures smooth and precise tilt control and ensures safety
- **Optimized Profile** for Efficient Grading & Ditching
- **Durable Construction** for Long Service Life
- **Back welded Cutting Edge** - optional
- **Horizontal wear bars** - optional
- **Reversible Bolt-on Cutting Edge** - optional

Equip your excavator for unmatched versatility and control on any grading or ditching project with the GDH Hydraulic Tilt Grading & Ditching Bucket. This innovative attachment boasts a ±45° hydraulic tilt mechanism, allowing effortless angle adjustments for perfect slopes and efficient work on uneven terrain.

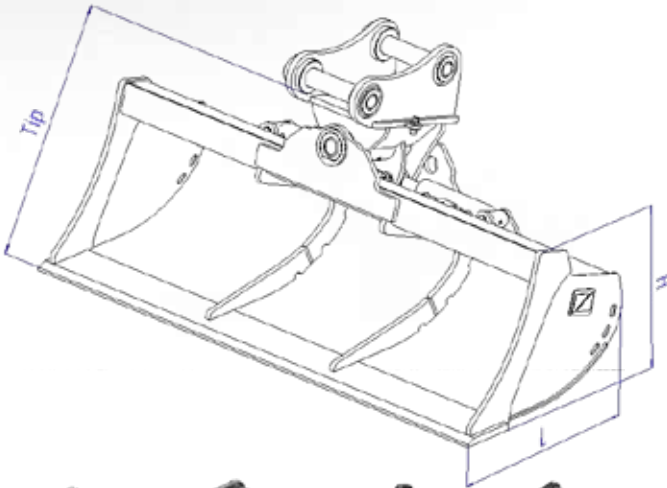


The GDH Hydraulic Tilt Grading & Ditching Bucket is ideal for:

- Fine grading and leveling on uneven surfaces
- Streamlined ditching with precise angle control for various applications (drainage, utilities, irrigation)
- Efficient bank sloping and contouring projects
- Landscaping applications demanding intricate shaping and clean lines
- Any project requiring a versatile attachment with effortless control for perfect results

Upgrade your excavator's capabilities and conquer diverse grading and ditching challenges with the GDH Hydraulic Tilt Grading & Ditching Bucket. Contact us today to explore the possibilities!

	GDH-120	GDH-160	GDH-190	GDH-230	GDH-260	GDH-300	GDH-400
Machine class [t]	10 - 12	12 - 16	16 - 19	19 - 23	23 - 26	26 - 30	30 - 40
L / H / Tip	740/556/856	794/601/895	863/651/973	931/700/1032	1023/773/1150	1117/842/1230	1220/915/1375
Width[mm]	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
1400	345 / 358						
1500	372 / 371						
1600	400 / 385	456 / 447	530 / 572	677 / 624			
1800	453 / 411	518 / 479	603 / 607	772 / 662	858 / 787	1012 / 953	
2000		580 / 510	685 / 638	867 / 700	962 / 835	1136 / 1012	1336 / 1218
2400					1171 / 932	1384 / 1129	1632 / 1350
2600							1780 / 1415
Quick coupler brackets	S45, S50 MS10 CW20 OQ45, OQ60 M18	S60 MS10 CW20 OQ60, OQ65 M18 S1 SW33	S60 MS10 CW30 OQ65 M26 S1 SW33	S70 MS21 CW30 OQ65, OQ70 M26 S2 SW33	S70 MS21 CW30 OQ65, OQ70 S2 M26 SW48	S70 MS21 CW40 OQ70, OQ70-55 S2 SW48	S80 MS25 CW45 OQ80 S3 SW48

SB DITCHING/GRADING BUCKET DUTCH PROFILE


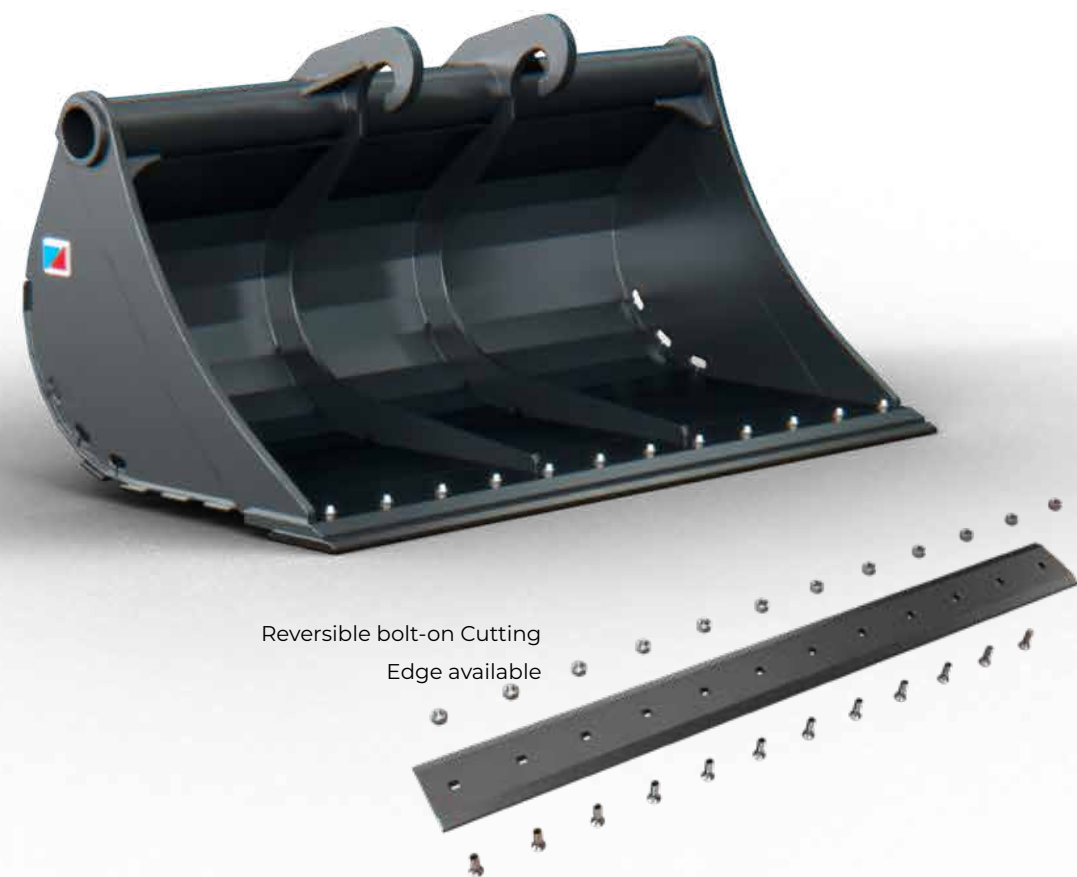


Boost Clay Handling Efficiency: The Dutch Profile Ditching & Grading Bucket. Wider opening facilitates smooth discharge of sticky soils, ideal for efficient grading & ditching.

Key Features:

- Dutch Profile for **Efficient Clay Handling**
- **Optimized Design** for Grading & Ditching
- **Durable Construction** for Long Service Life
- **Back welded Cutting Edge** - optional
- **Horizontal wear bars** - optional
- **Reversible Bolt-on Cutting Edge** - optional

Equip your excavator for peak performance in clay-heavy applications with the Dutch Profile Ditching & Grading Bucket. Featuring a wider bucket opening, this innovative attachment facilitates the smooth discharge of sticky soils, minimizing downtime and maximizing efficiency on grading and ditching projects.

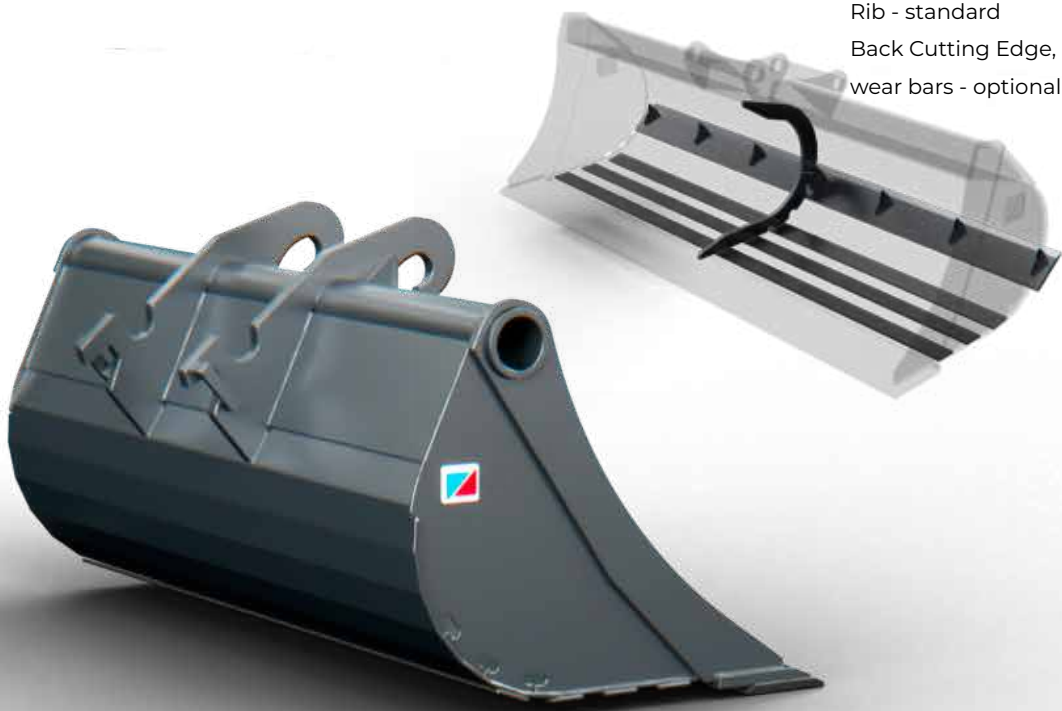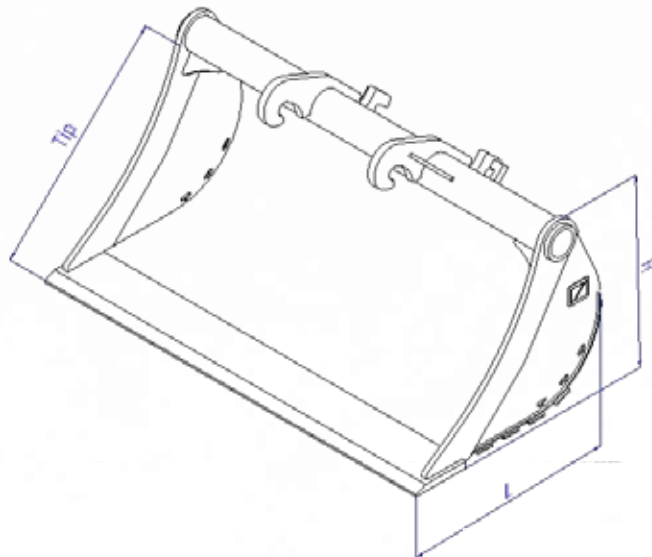

Rib - standard
Back Cutting Edge, Horizontal wear bars - optional

The Dutch Profile Ditching & Grading Bucket is ideal for:

- Grading and ditching projects in clay-heavy or sticky soil conditions
- Drainage, utility line, and irrigation ditching applications
- Road construction and maintenance projects encountering clay soils
- Landscaping applications requiring efficient material handling
- Any project demanding a bucket optimized for smooth clay discharge

Upgrade your excavator's capabilities and conquer grading and ditching challenges in clay-heavy environments with the Dutch Profile Ditching & Grading Bucket. Contact us today to explore the perfect fit for your machine!

	SB-160	SB-190	SB-230	SB-260	SB-300	SB-400
Machine class [t]	12 - 16	16 - 19	19 - 23	23 - 26	26 - 30	30 - 40
L / H / Tip	842/710/830	894/764/900	965/826/957	1030/875/1030	1149/1000/1155	1232/1063/1237
Width [mm]	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
1500	583 / 357					
1600	628 / 376	731 / 394	820 / 479			
1800	717 / 414	836 / 434	938 / 527	1077 / 553	1346 / 773	
2000	807 / 453	940 / 474	1057 / 574	1214 / 602	1520 / 840	1739 / 889
2200		1045 / 513	1176 / 622	1351 / 652	1695 / 908	1940 / 960
2400				1489 / 701	1870 / 976	2141 / 1030
2500					1957 / 1009	2242 / 1065
Quick coupler brackets	CW20 SW33	CW20, CW30 SW33	CW30 SW33, SW48	CW30, CW40 SW48	CW40 SW48	CW45 SW66



DCB GRADING & DITCHING BUCKET ROUND PROFILE





Achieve Clean Results & Streamlined Workflow: DCB Round Profile Bucket. Ideal for efficient grading & ditching with smooth material flow and minimal drag.

Key Features:

- Round Profile for Smooth Material Flow: Minimizes drag and maximizes efficiency during operation.
- Optimized Design for Grading & Ditching: Delivers superior control and clean results for various applications.
- Durable Construction for Long Service Life
- Back welded Cutting Edge - optional
- Horizontal wear bars - optional
- Reversible Bolt-on Cutting Edge - optional

Equip your excavator for exceptional performance and minimized material drag with the DCB Round Profile Grading & Ditching Bucket. This attachment features a curved design that optimizes material flow, ensuring clean results and streamlined workflows on any grading or ditching project.

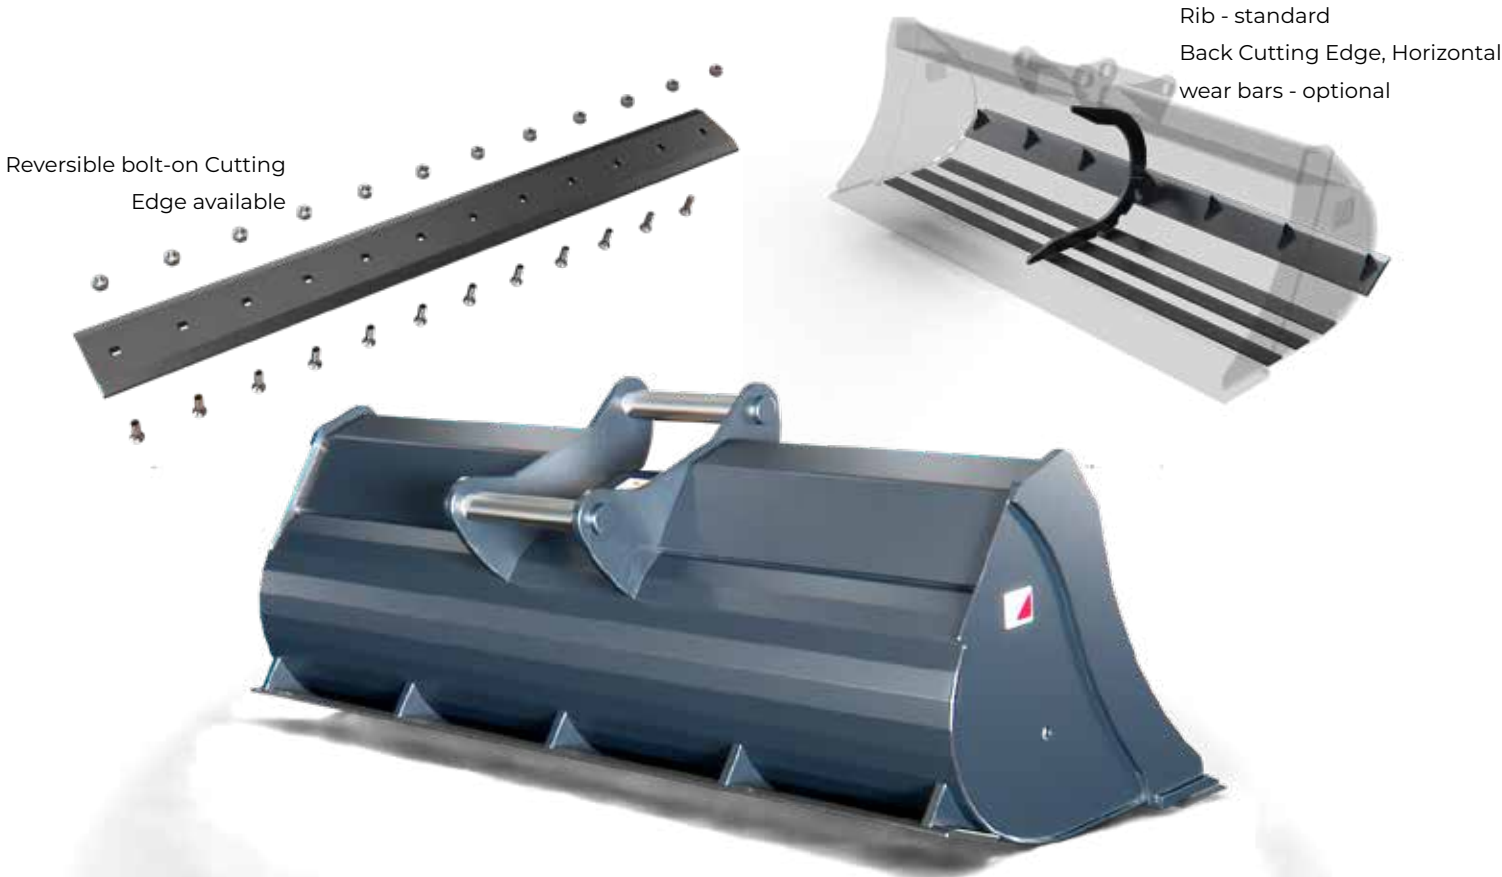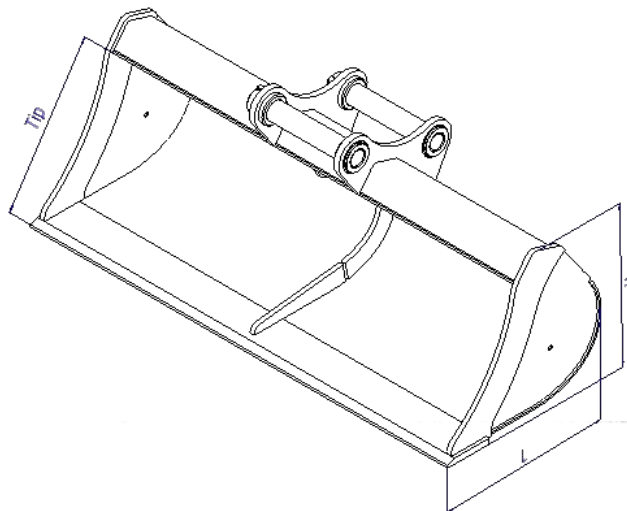

The DCB Round Profile Grading & Ditching Bucket is ideal for:

- Efficient grading and leveling tasks on diverse projects
- Streamlined ditching with minimal soil resistance for faster completion
- Road construction and maintenance projects requiring clean lines
- Landscaping applications demanding smooth material handling and minimal drag
- Any project where efficient material flow and reduced drag are crucial

Upgrade your excavator's capabilities and conquer grading and ditching challenges with the DCB Round Profile Grading & Ditching Bucket. Contact us today to explore the perfect fit for your machine!

	DCB-120	DCB-160	DCB-190	DCB-230	DCB-260	DCB-300	DCB-400
Machine class [t]	10 - 12	12 - 16	16 - 19	19 - 23	23 - 26	26 - 30	30 - 40
L / H / Tip	657/585/576	695/620/605	755/673/657	807/720/703	881/785/767	952/850/833	1049/939/919
Width [mm]	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
1400	351 / 218						
1500	379 / 231						
1600	406 / 244	454 / 273	535 / 298	612 / 320			
1800	462 / 270	515 / 302	608 / 328	696 / 353	819 / 503	955 / 590	
2000		577 / 329	680 / 359	779 / 384	918 / 551	1071 / 643	1307 / 721
2400					1116 / 644	1304 / 748	1592 / 836
2600							1735 / 893
Quick coupler brackets	S45, S50 CW20 OQ45, OQ60 M18	S60 CW20 OQ60, OQ65 M18 SW33	S60 CW30 OQ65 M26 SW33	S70 CW30 OQ65, OQ70 M26 SW33	S70 CW30 OQ65, OQ70 M26 SW48	S70 CW40 OQ70, OQ70-55 SW48	S80 CW45 OQ80 SW48

PS UNIVERSAL SCANDINAVIAN GRADING BUCKET




Versatile Grading Performance: The PS Universal Nordic Grading Bucket. Ideal for diverse grading and leveling tasks with exceptional control and efficiency.

Key Features:

- **Optimized Design** for Efficient Grading: Delivers smooth performance and precise control for diverse tasks.
- **Durable Construction** for Long Service Life
- **Back welded Cutting Edge** - optional
- **Horizontal wear bars** - optional
- **Reversible Bolt-on Cutting Edge** - optional
- **Tiltrotator compatible**

Equip your excavator for maximum versatility on any grading project with the PS Universal Nordic Grading Bucket. This attachment delivers exceptional control and a streamlined design, ensuring efficient material handling and clean results for various applications.

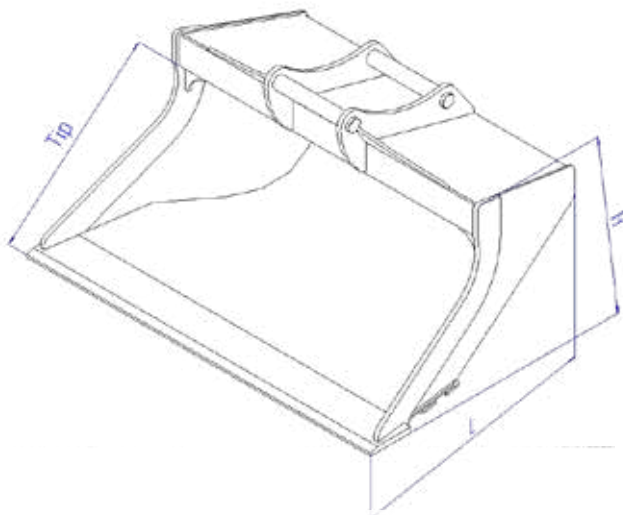

The PS Universal Nordic Grading Bucket is ideal for:

- Precise grading and leveling on various projects
- Road construction and maintenance applications
- Landscaping projects requiring clean lines and efficient material handling
- General grading tasks demanding versatility and control
- Any project where a reliable grading bucket is essential

Upgrade your excavator’s capabilities and conquer diverse grading challenges with the PS Universal Nordic Grading Bucket. Contact us today to explore the perfect fit for your machine!

	PS-120	PS-160	PS-190	PS-230	PS-300
Machine class [t]	8 - 12	12 - 16	16 - 19	19 - 23	23 - 30
L / H / Tip	1026/633/743	1195/705/845	1289/744/914	1489/853/1046	1502/967/1082
Width[mm]	SAE / KG	SAE / KG	SAE / KG	SAE / KG	SAE / KG
1500	534 / 262				
1600	582 / 285	744 / 424			
1800	771 / 355	872 / 476	937 / 560	1179 / 679	1389 / 863
2000	867 / 386	1000 / 528	1083 / 624	1374 / 753	1609 / 953
2100		1064 / 554	1155 / 656	1472 / 791	1720 / 998
2200		1128 / 651	1228 / 690	1570 / 834	1830 / 1043
Quick coupler brackets	S60 MS10 OQ45 M18	S60 MS10 OQ65 M18 S1 SW33	S60 MS10 OQ60, OQ65 M26 S1 SW33	S70 MS21 OQ65, OQ70 M26 S2 SW33, SW48	S70 MS21 OQ70, OQ70-55 S2 SW48

CB HYDRAULIC CLAMP / GRAB BUCKET





Unleash Multitasking Power: The CB Hydraulic Clamp Bucket. Grab, Sort & Transport with Ease. Double pilot check valve ensures work-holding & safety.

Key Features:

- **Powerful Hydraulic Clamp:** Ensures secure grabbing and handling of various materials.
- **Versatile Functionality:** Ideal for grabbing, sorting, transporting, and more.
- **Double Pilot Check Valve (Standard):** Prioritizes safety with secure work-holding.
- **Durable Construction** for Long Service Life
- Available teeth systems: **CAT J series, BYG Futura, ESCO UltraLok**

Equip your excavator for superior versatility and take on diverse material handling tasks with the CB Hydraulic Clamp Bucket. This innovative attachment goes beyond traditional digging, offering exceptional functionality for grabbing, sorting, and transporting a wide range of materials. From laying pipes and transporting tree trunks to handling large stones and debris, the CB Clamp Bucket maximizes efficiency and streamlines workflows on any project.

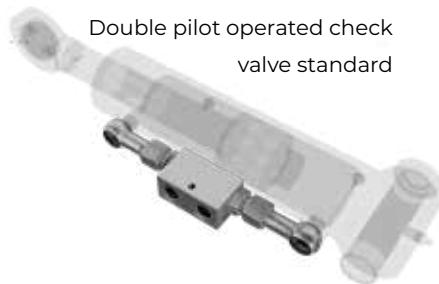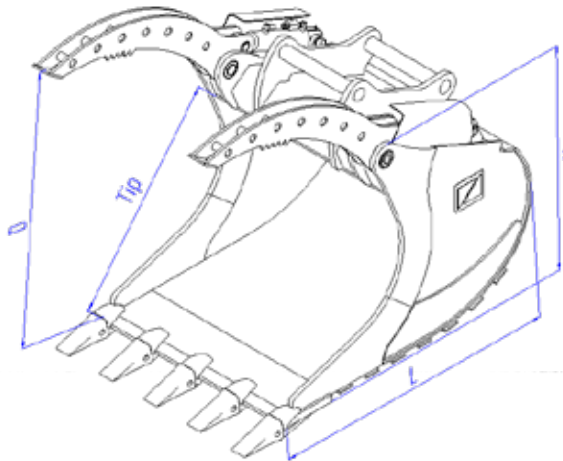

Double pilot operated check valve standard



The CB Hydraulic Clamp Bucket is ideal for:

- Loading, unloading, and sorting various materials (rocks, pipes, debris, tree trunks, etc.)
- Landscaping projects requiring precise material placement and transport
- Construction applications demanding a versatile attachment for diverse tasks
- Streamlining workflows in confined spaces or on complex jobsites
- Any project requiring a secure and efficient solution for material handling

Upgrade your excavator's capabilities and conquer diverse challenges with the CB Hydraulic Clamp Bucket. Contact us today to explore the possibilities!

Model	Machine class [t]	Width [mm]	Weight [kg]	Capacity [dm3]	Teeth	Height [mm]	Tip [mm]	Length [mm]	E [mm]	D [mm]	Quick coupler brackets
CBR-120	10 - 12	1000	355	430	5	843	820	1142	1100	750	S60, MS10, CW20, OQ60, M18, SW33
CBR-190	12 - 19	1200	631	803	5	1010	1127	1479	1400	900	S70, MS10, CW30, OQ65, M18, S1, SW33
CBR-260	19 - 26	1200	1100	1071	5	1240	1143	1597	1700	1100	S70, MS21, CW40, OQ70, M26, S2, SW48

TR TRAPEZOID PROFILE BUCKETS



Maximize Ditching Efficiency with TR Trapezoid Profile Buckets

Key Features:

- **Optimized Trapezoid Profile:** The unique trapezoid design ensures clean trench walls and minimal spoil, reducing rework and material handling.
- **Superior Digging Performance:** TR buckets excel in challenging soils, delivering efficient excavation for deep ditches and channels.
- Available teeth systems: **CAT J series, BYG Futura, ESCO UltraLok**

Benefits:

- **Clean Results:** Achieve precise ditch profiles with minimal soil disturbances, minimizing the need for additional finishing.
- **Reduced Downtime:** The efficient trapezoid design minimizes material handling and rework, leading to faster project completion.
- **Broad Applicability:** TR buckets are suitable for various ditching tasks, from drainage channels to utility installations.

Upgrade your excavator's capabilities with TR trapezoid profile buckets. Experience improved efficiency, cleaner results, and reduced downtime on your next ditching project.



UB U-LINE BUCKET



Achieve Consistent U-Shaped Trenches with U-Line Buckets

Key Features:

- **Unique U-Shaped Design:** Excavate trenches with a consistent U-profile, ideal for pipe laying, foundation work, and utility installations.
- **Improved Efficiency:** Minimize back-filling and handwork by creating the desired trench shape in a single pass.
- **Reduced Material Handling:** The U-Line Bucket's design optimizes material removal, reducing the need for excess excavation and disposal.
- Available teeth systems: **CAT J series, BYG Futura, ESCO UltraLok**

U-Line Buckets are a valuable addition to your excavator fleet, promoting accuracy, efficiency, and cost savings in projects requiring U-shaped trenches.

VB V-LINE BUCKET



Key Features:

- **Customizable angles:** Tailor the bucket angle to meet your exact slope requirements, eliminating the need for multiple passes.
- **Efficient one-pass operation:** Minimize work time and maximize productivity by creating the desired slope in a single pass.
- Available teeth systems: **CAT J series, BYG Futura, ESCO UltraLok**

V-Line Buckets: Achieve precise ditching and slope creation in one efficient pass with customizable angles. Ideal for applications like drainage channels, swales, and road shoulders, V-Line Buckets ensure accurate results and boost productivity on your next excavation project.

TH HYDRAULIC THUMB FOR EXCAVATOR



Precise Asphalt Cutting: The Excavator Asphalt Cutter. Tackle road repairs, utility trenches, & more with clean cuts from a robust steel disc. Available in symmetrical & asymmetrical disc configurations.

Key Features:

- **Optimal Compatibility:** Engineered to work seamlessly with your existing bucket and coupler setup for maximum efficiency
- **Powerful Hydraulic Operation:** Delivers precise control and firm gripping power for secure material handling
- **Durable Construction:** Built with high-strength materials to withstand demanding applications and minimize wear
- **Double Pilot Check Valve (Standard):** Ensures operational safety and maintains secure holding power

Transform your excavator into a versatile asphalt-cutting powerhouse with the AC Excavator Asphalt Cutter. Featuring a robust steel disc, this attachment tackles various asphalt applications with unmatched efficiency and control on projects of any size. Choose from symmetrical or asymmetrical disc configurations to perfectly suit your specific cutting needs.

Model	Machine class [t]	Width [mm]	Weight [mm]	Tip radius[mm]
TH-16	10 - 16	700	310	1150
TH-19	16 - 19	700	340	1200
TH-26	19 - 26	780	520	1420
TH-30	26 - 30	800	620	1520

*Disclaimer: specific weight and dimensions depend on the configuration of excavator and attachments. Data above is approximate.



Available in Two Configurations:

- **Direct Link Design:** Offers excellent grabbing power and simplified operation for standard applications
- **Progressive Link Design:** Features a wider range of motion (180 degrees+) for enhanced versatility in complex material handling tasks

The Hydraulic Thumb Attachment is ideal for:

- Land clearing and site preparation requiring efficient debris handling
- Forestry applications demanding secure log and brush manipulation
- Construction projects requiring precise placement of rocks, pipes, and materials
- Demolition applications with significant material sorting requirements
- Any project demanding enhanced grabbing and handling capabilities beyond standard bucket functions

Upgrade your excavator's capabilities and conquer diverse material handling challenges with our Hydraulic Thumb attachment. Contact us today to explore the perfect configuration for your machine and specific application requirements!

ACa ASYMMETRICAL ASPHALT CUTTER




Precise Asphalt Cutting: The Excavator Asphalt Cutter. Tackle road repairs, utility trenches, & more with clean cuts from a robust steel disc. Available in symmetrical & asymmetrical disc configurations.

Key Features:

- Sharp Steel Disc
- Adjustable Cutting Depth
- Symmetrical & Asymmetrical Disc Configurations

Transform your excavator into a versatile asphalt-cutting powerhouse with the AC Excavator Asphalt Cutter. Featuring a robust steel disc, this attachment tackles various asphalt applications with unmatched efficiency and control on projects of any size. Choose from symmetrical or asymmetrical disc configurations to perfectly suit your specific cutting needs.

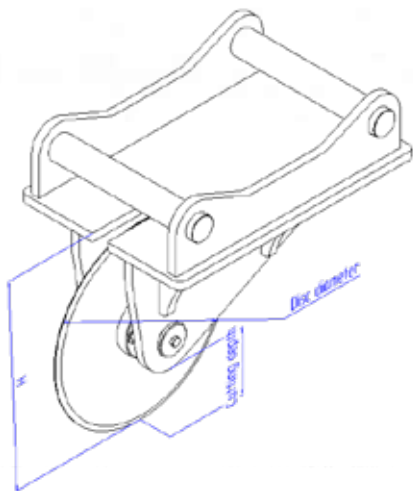


ACs SYMMETRICAL ASPHALT CUTTER



The Excavator Asphalt Cutter is ideal for:

- Road repair and maintenance projects
- Utility trenching in asphalt surfaces
- Sidewalk and curb cutting applications
- Precise asphalt removal for landscaping or construction projects on smaller sites
- Any task requiring clean and efficient asphalt cutting, suited for the reach and power of excavators

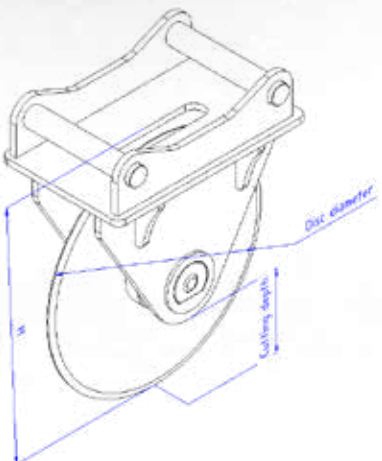

Upgrade your excavator's capabilities and conquer asphalt challenges with the AC Excavator Asphalt Cutter. Contact us today to discuss your project needs and choose the perfect disc configuration!

Model	Machine class [t]	Weight [kg]	Disc diameter [mm]	Cutting depth [mm]	Height [mm]	Adapter
AC-18	12 - 18	99	450	150	467	S60 MS10 CW20 OQ60, OQ65 M18 S1 SW33
AC-30	19 - 30	165	450	150	472	S70 MS21 CW30, CW40 OQ70 M26 S2 SW48


MR MULTI-RIPPER FOR EXCAVATOR



Boost Large Excavator Productivity: MR Multi-Rippers

Key Features:

- **High Penetration Power:** shank design delivers superior ripping force, tackling tough soil, rock, and frozen ground efficiently.
- **Increased Fragmentation:** MR Multi-Rippers create smaller, more manageable material for faster processing and loading.
- Available teeth systems: **CAT J series, BYG Futura, ESCO UltraLok**

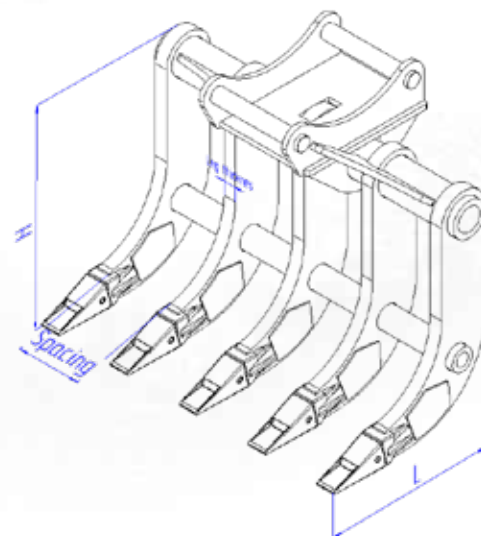

Model	Machine class [t]	Width [mm]	Height [mm]	Length [mm]	Weight [kg]	Number of legs	Leg thickness [mm]	Spacing [mm]	Teeth	Quick coupler brackets
MR-17	11 - 17	1300	727	632	415	5	40	264	J250, V19, U20	S60 MS10 CW20 OQ60, OQ65 M18 S1 SW33
MR-22	18 - 22	1300	856	674	546	5	50	252	J300, V29, U30	S70 MS21 CW30 OQ65, OQ70 M26 S1, S2 SW33, SW48
MR-26	23 - 26	1300	935	772	734	5	50	252	J350, V33, U35	S70 MS21 CW30 OQ70 M26 S2 SW48
MR-32	27 - 32	1300	1020	829	994	5	60	240	J400, V39, U40	S70 MS25 CW40, CW45 OQ70-55 S3 SW48




RIP RIPPER WITH PROTECTOR FOR EXCAVATOR



Break Up Tough Ground: Large Excavator Rippers

Key Features:

- **Powerful Penetration:** Designed for superior ripping force, the single shank tackles tough soil, rock, and frozen ground efficiently.
- **Improved Efficiency:** Excavator Rippers fracture material for easier processing and loading, streamlining your workflow.
- **Durable Construction:** Built with high-strength materials to withstand demanding jobs and minimize wear.

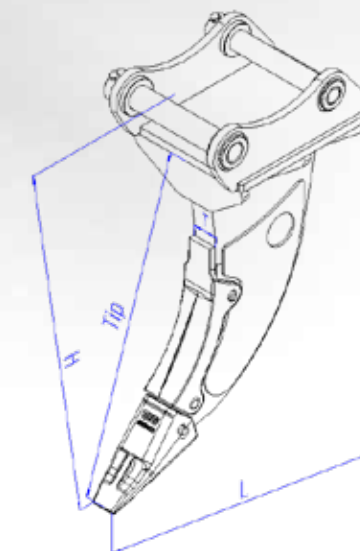

Model	Machine class [t]	Weight [kg]	Length [mm]	Tip [mm]	Height [mm]	T [mm]	Tooth	Quick coupler brackets
Ripper-C	14 - 18	280	823	991	928	75	9W-2451	S60 MS10 CW20 OQ65 M18 S1 SW33
Ripper-D	19 - 29	403	923	1114	1058	75	9W-2451	S70 MS21 CW30, CW40 OQ70, OQ70-55 M26 S2 SW48
Ripper-E	30 - 40	490	893	1204	1170	75	9W-2451	S80, MS25, CW45, OQ80, S3, SW48
Ripper-H	40 - 65	684	1063	1425	1402	75	9W-2451	S90 CW55 OQ90 SW66




DuoRIP DOUBLE RIPPER FOR ROOT EXTRACTION



Key Features:

- **Double Shanks for Powerful Root Extraction**
- **Durable Construction** for Long Service Life
- Fits Most Excavator Models
- Available teeth systems: **CAT J series, BYG Super V, ESCO UltraLok**

Equip your excavator for superior performance on any land clearing project with the Double Ripper attachment. This innovative attachment features two robust shanks that penetrate deep and rip through even the most stubborn root systems. The Double Ripper maximizes productivity and minimizes down-time, ensuring efficient land preparation for your projects.

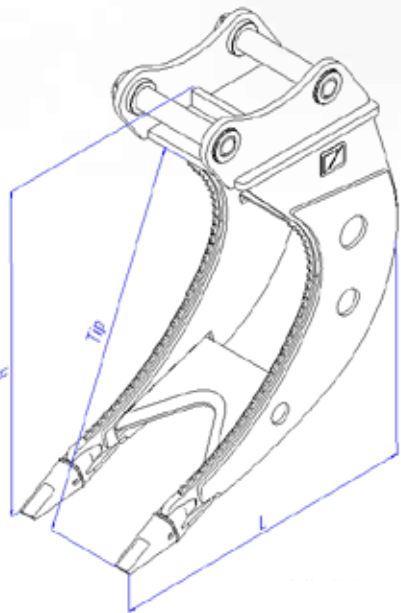

The Double Ripper Attachment is ideal for:

- Land clearing and site preparation with challenging root systems
- Efficient removal of large roots, stumps, and debris
- Streamlining land development projects
- Forestry applications requiring effective root extraction
- Any project demanding powerful and efficient root removal

Upgrade your excavator’s capabilities and conquer demanding land clearing challenges with the Double Ripper. Contact us today to explore the perfect fit for your machine!

Model	Machine class [t]	Width [mm]	Weight [kg]	Height [mm]	Tip [mm]	Lenght [mm]	Teeth	Quick coupler brackets
Duo-Ripper-6	2.5 - 6.0	365	102	656	695	678	J200, V13	S40 MS03 CW05, CW10 OQ40 M10
Duo-Ripper-12	6.0 - 12	450	220	852	900	880	J200, V17, U20	S45, S50 MS08, MS10 CW10 OQ45 M10
Duo-Ripper-18	12 - 18	450	380	1109	1168	1072	J250, V19, U20	S60 MS10 CW20 OQ60, OQ65 M18 S1 SW33
Duo-Ripper-30	18 - 30	500	565	1267	1372	1262	J300, V23, U25	S70 MS21 CW30, CW40 OQ70 M26 S2 SW48

GRB GRADING & LEVELLING BEAMS



Grading Beams are a useful attachment for excavators that can help achieve a flat surface before further ground work. They are available in different widths and come with different tilting and roller options. Excavator grading beams are **more precise than a standard grading bucket** and are designed to be **wide and flat** to give you both a large working width and great visibility.


Base features:

- HB500 Wear Bars on bottom
- HB500 Cutting Edge
- Top plate ready for Bolt-On Bracket
- Tiltrotator Compatible
- Adjustable Roller
- High-Quality Bearings
- Bearing to Roller Connection secured from mechanical damage


Optional features:

- Bolt-On Bracket / Adapter
- 250 mm Extendable Side Beams
- Mounting spot for level measuring device
- Hydraulic cylinder guard

Hardox wear bars on bottom of beam - option

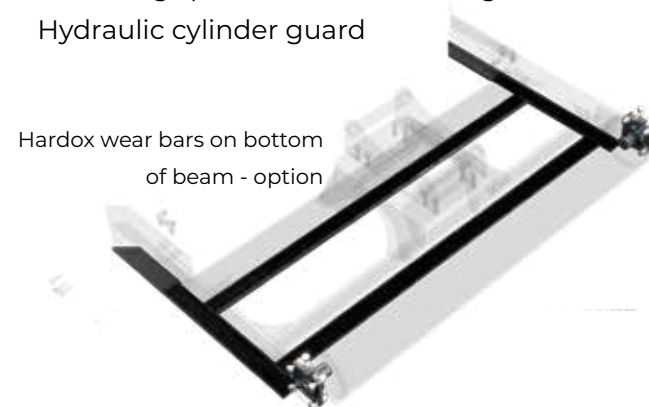


Standard model - rigid with roller

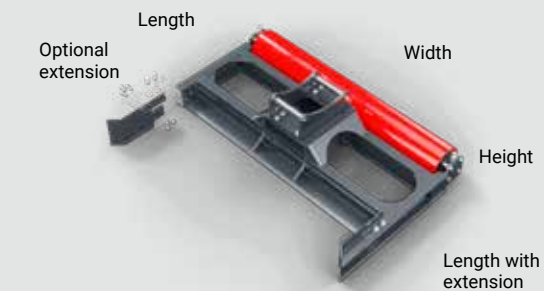

Standard version with a roller on bearings allowing smooth operation. Roller's height can be adjusted.

Model	Machine class [t]	Width [mm]	Weight [kg]	Height [mm]	Length [mm]	Extended length [mm]	Roller diameter [mm]	Quick coupler brackets
GRB midi	6 - 18	2000	325	300	884	1290	194	S45, S50, S60 MS08, MS10 CW10, CW20 OQ45, OQ60, OQ65 M18 S1 SW33
GRB midi		2500	375					
GRB maxi	10 - 30	2500	482	340	1015	1523	245	S70 MS10, MS21 CW20, CW30, CW40 OQ65, OQ70 M26 S2 SW33, SW48
GRB maxi		3000	540					


Hydraulic-tilting model with roller

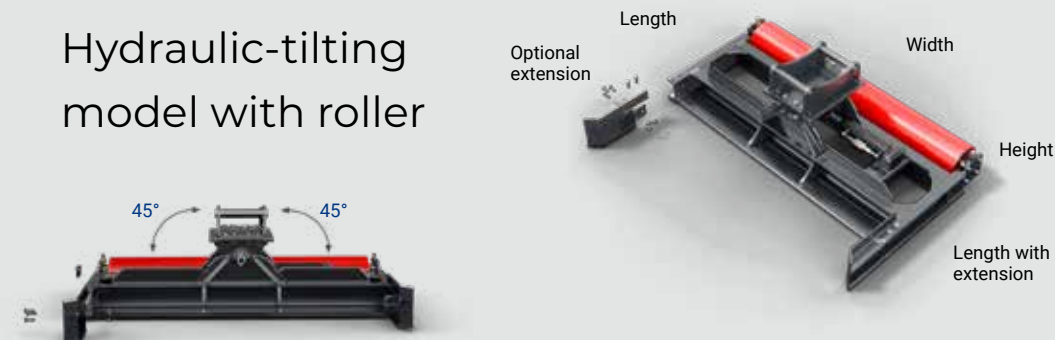

Most versatile and robust version. Everything in standard plus. Tilts up to 45 degrees each side. Double pilot check valve for maximum safety and for holding exact angle.

Model	Machine class [t]	Width [mm]	Weight [kg]	Height [mm]	Length [mm]	Extended length [mm]	Roller diameter [mm]	Quick coupler brackets
GRB midi	6 - 18	2000	480	445	884	1290	194	S45, S50, S60, MS08, MS10, CW10, CW20, OQ45, OQ60, OQ65, M18, S1, SW33
GRB midi		2500	530					
GRB maxi	10 - 30	2500	620	470	1015	1523	245	S70, MS10, MS21, CW20, CW30, CW40, OQ65, OQ70, M26, S2, SW33, SW48
GRB maxi		3000	680					

Basic model - rigid without roller

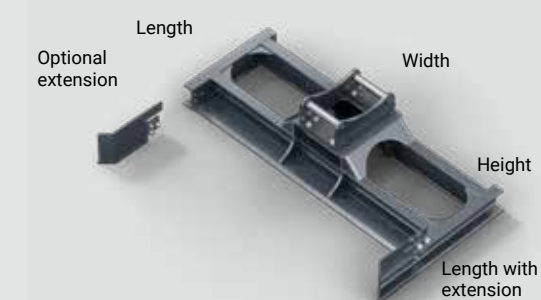

Basic, economic version of the grading bar. Features no roller, so no adjustments are possible. Still very usable in less demanding tasks.

Model	Machine class [t]	Width [mm]	Weight [kg]	Height [mm]	Length [mm]	Extended length [mm]	Quick coupler brackets
GRB midi	6 - 18	2000	216	300	700	1106	S45, S50, S60, MS08, MS10, CW10, CW20, OQ45, OQ60, OQ65, M18, S1, SW33
GRB midi		2500	247				
GRB maxi	10 - 30	2500	357	340	800	1306	S70, MS10, MS21, CW20, CW30, CW40, OQ65, OQ70, M26, S2, SW33, SW48
GRB maxi		3000	372				



TERMS GENERAL TERMS AND CONDITIONS OF SALE

1. QUOTATIONS AND OFFERS
1.1. Quotations valid for 30 days. 1.2. Delivery timeframes honored if order confirmed within validity period. 1.3. Prices exclude VAT and are ex-works from our facility unless specified otherwise.
2. ORDER CONFIRMATION
2.1. Orders must contain complete product identification data. 2.2. No responsibility for errors from incomplete/incorrect customer information. 2.3. Verbal orders require written confirmation. 2.4. Order confirmation implies acceptance of these terms.
3. DELIVERY TERMS
3.1. Delivery terms are indicative and refer to availability at our facilities. 3.2. No responsibility for delays beyond our control. 3.3. Buyer cannot cancel orders or claim damages for delays. 3.4. We may invoice prepared orders if:
Items not collected within 5 days after readiness notification
Shipment delayed due to lack of buyer instructions
4. TRANSPORT AND SHIPPING
4.1. Transport always at buyer's risk and expense. 4.2. We will choose transport means if not specified, charging costs to buyer. 4.3. Loading expenses borne by buyer. 4.4. Transport complaints must be addressed to carrier. 4.5. Not responsible for damage from improper loading or distribution. 4.6. Not responsible for carrier delays.
5. PACKAGING
5.1. Standard packaging provided, no liability for related losses. 5.2. Pallets/special packaging invoiced at cost.
6. PRICES
6.1. Prices ex-works, excluding VAT. 6.2. Prices subject to change before order confirmation. 6.3. Prices valid for standard specifications only.
7. PAYMENT
7.1. Only payments to our address or specified bank accounts accepted. 7.2. Late payments subject to maximum legal interest rate. 7.3. Interest charges do not extend payment terms. 7.4. Non-payment may result in suspended deliveries or canceled orders.
8. SUSPENSION OF SUPPLY
8.1. Right to cancel/suspend supplies if:
Credit limit exceeded
Buyer's financial deterioration
Unpaid previous invoices
9. COMPLAINTS AND CLAIMS
9.1. Complaints considered only if submitted in writing within 8 days of receipt. 9.2. Complaints don't justify payment delays. 9.3. Liability limited to replacement/repair of defective products.
10. RETURNS
10.1. Returns accepted only with prior written agreement, sent freight prepaid. 10.2. Products must be unused, in original condition and packaging. 10.3. Custom/specially ordered products non-returnable.
11. WARRANTY
11.1. Products warranted for 12 months from delivery date. 11.2. Limited to repair/replacement of defective parts. 11.3. Warranty excludes:
Normal wear parts
Improper use damage
Transport damage
Unauthorized repair damage
Non-original parts damage
Improper storage damage 11.4. Warranty void if:
Payment terms not respected
Unauthorized modifications
Abnormal use/overloading 11.5. Warranty limited to repair/replacement, excludes other compensation.
12. UPDATES AND MODIFICATIONS
12.1. Right to modify products without notice. 12.2. No obligation to update previous products.
13. RETENTION OF TITLE
13.1. Goods remain our property until full payment. 13.2. Buyer must maintain products properly during this period. 13.3. Right to repossess goods upon payment default.
14. INTELLECTUAL PROPERTY
14.1. Technical information remains our exclusive property. 14.2. No reproduction or third-party transmission without consent.
15. APPLICABLE LAW AND JURISDICTION
15.1. Terms governed by Polish law. 15.2. Disputes subject to Polish courts' jurisdiction.



TERMS GENERAL TERMS AND CONDITIONS OF SALE

16. FINAL PROVISIONS
16.1. Invalid provisions don't affect remaining terms. 16.2. No waiver of breach constitutes waiver of subsequent breaches. 16.3. These terms supersede all previous agreements.
- ADDITIONAL SPECIFIC TERMS FOR EXCAVATOR AND LOADER ATTACHMENTS
17. TECHNICAL SPECIFICATIONS
17.1. Weight capacity and dimensions are approximate. 17.2. We reserve the right to make technical improvements without notice. 17.3. Attachments must be used with compatible equipment as specified in technical documentation.
18. EQUIPMENT COMPATIBILITY
18.1. Buyer is responsible for ensuring compatibility with their machinery. 18.2. We provide attachment specifications but cannot guarantee compatibility with all equipment models. 18.3. Custom adapters available by separate quotation.
19. USE AND MAINTENANCE
19.1. Products must be used in accordance with our usage guidelines and general industry safety standards. 19.2. Improper use, including exceeding recommended capacity, voids warranty. 19.3. Regular maintenance as specified in the product manual is required to maintain warranty.
20. SAFETY REGULATIONS
20.1. Our products comply with relevant EU safety regulations as of manufacturing date. 20.2. Buyer is responsible for compliance with local regulations and standards. 20.3. Safety instructions provided with products must be followed.
21. SPARE PARTS
21.1. Original spare parts available for minimum 5 years from purchase. 21.2. Use of non-original parts voids warranty and transfers all liability to buyer. 21.3. Wear parts (teeth, blades, etc.) are excluded from standard warranty.
22. PRODUCT TESTING
22.1. All products undergo quality control before shipping. 22.2. Buyer may request additional testing or specific certification at additional cost. 22.3. Testing protocols available upon request.
23. INSTALLATION
23.1. Installation instructions provided with each product. 23.2. Installation by qualified personnel recommended. 23.3. Improper installation voids warranty.
24. FORCE MAJEURE
24.1. Neither party liable for failure to perform due to circumstances beyond reasonable control. 24.2. Affected party must notify other party promptly. 24.3. Performance obligations suspended during force majeure event.

The above terms represent the complete agreement regarding our products and supersede any prior communications or understandings. By placing an order, the buyer expressly acknowledges acceptance of these terms and conditions. These terms may be updated periodically, with the current version available upon request.

[illegible]

Hydro-Instal T.Sieruta B.Sieruta sp.j.

ul. Bohaterów Westerplatte 11

07-410 Ostrołęka

Poland

EU VAT ID: PL7581556948



**PROGRAM
REGIONALNY**
NARODOWA STRATEGIA SPÓJNOŚCI



+48 505 778 308



info@sieruta.com



sieruta.com



UNIA EUROPEJSKA
EUROPEJSKI FUNDUSZ
ROZWOJU REGIONALNEGO

